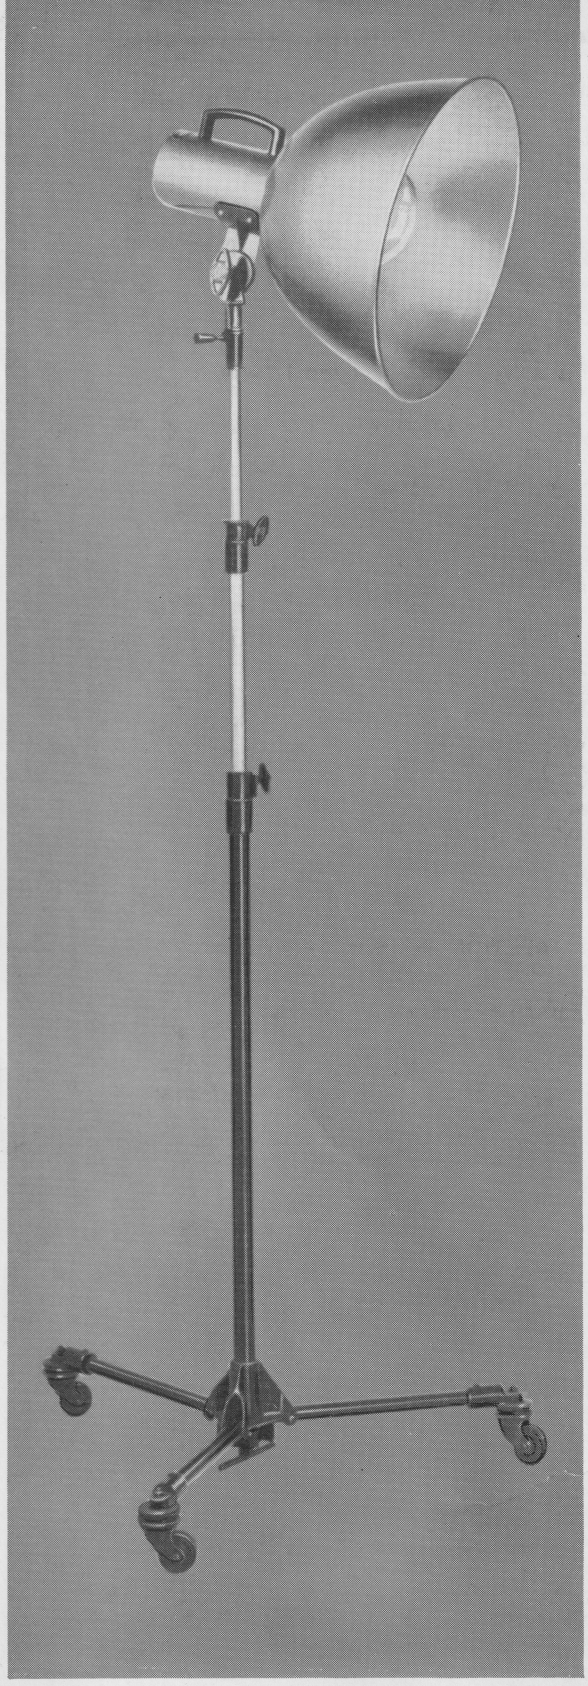

'SCOOP' M-R Type 1

'SCOOP' M-R Type 1

Light weight, general duty, high efficiency flood. Smooth soft beam over 120 degrees. The most widely used fill-light in all Studios.

SPECIFICATION

LAMPHEAD M-R Type 1

CONSTRUCTION	Single skin housing with light alloy fittings.
MOUNTING	Two-piece column with tilt control and $\frac{5}{8}$ inch diameter spud.
REFLECTOR	Spun aluminium with satin finish.
CABLE	25 feet of 3-core rubber covered, attached to lamphead.
SOCKET	Giant Edison Screw.
BULB TYPE AND RATING	(not included in price of lamp). Internal silica-coated recommended or Photoflood if desired. 500 or 1,000 watt. 115 or 230 volt. Lamp Ref. PP/3. 500 or 1,000 watt. 115 or 230 volt. Lamp Ref. Photopearl.

STAND M-R Type S500

(not included in price of lamp).

Double lift, folding type.

CONSTRUCTION	Steel tubing, non-ferrous metal fittings with 2 inch rubber-tyred castors.
SOCKET DIAMETER	$\frac{5}{8}$ inch.

MOLE-RICHARDSON